




|             |      |      |                              |             |       |
|-------------|------|------|------------------------------|-------------|-------|
| IDEALCHARGE | NAME | DATE | DRAWING TITLE                | CLASS       | DNY   |
| Drawn       |      |      | SPECIFICATION OF USB CHARGER | SCALE       | X:1   |
| Checked     |      |      |                              | Unit        | MM    |
| Approved    |      |      |                              | DRAWING NO. | SHEET |

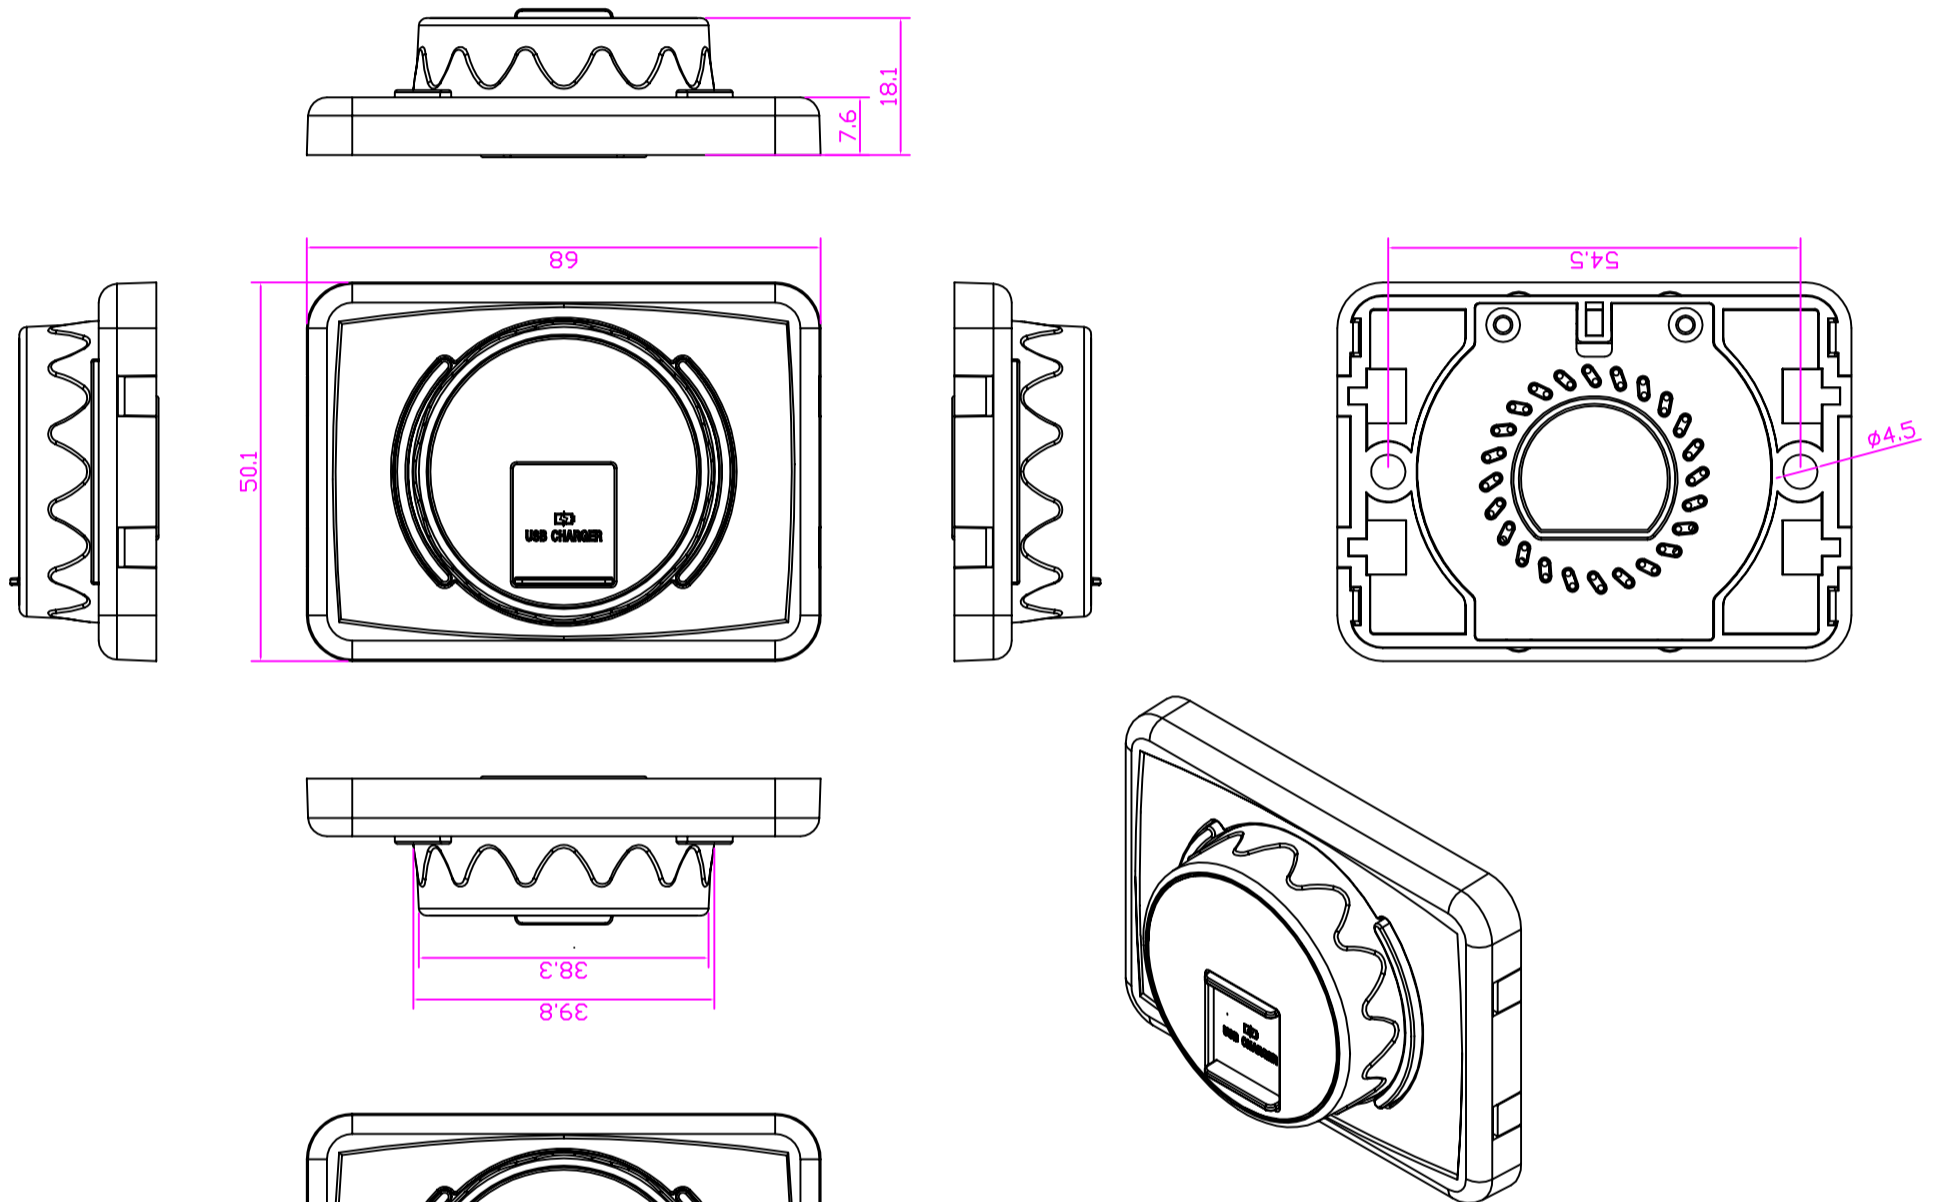

2USB

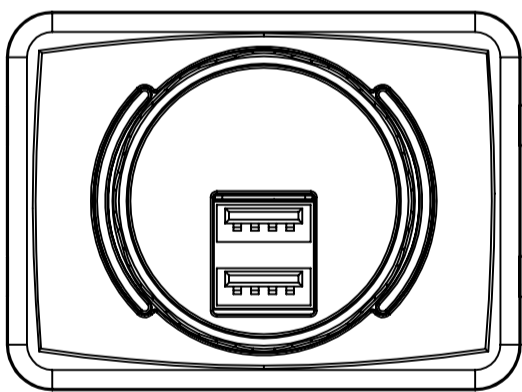

USB+TYPE C

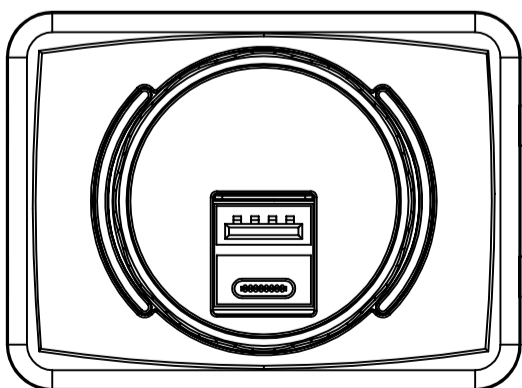

Specification

Working Voltage:DC12-24V

Working Temperature:-20~70°C

3100mA output current for mobile phones

Charging protection measures:

Input reverse protection

Output short protection

Too high input voltage protection

Too lower input voltage protection

Too high output current protection

4000V ESD protection

2000V EFT protection

Built - in LED light

Support charger specification:BC1.2 DCP

Easy - mount USB charger for buses